HUAWEI EG8145V5

Configuration interface

INTRODUCTION

This manual describes the main functions that can be viewed and changed by accessing the **HUAWEI Echolife EG8145V5 router with firmware version V5R019C00S100.**


You can access the user interface of the HUAWEI router through a web browser, from a computer or from mobile devices such as tablets and smartphones.

Through the user interface you can configure the device, enable/disable functions and obtain information on the status of the router and of your connections.

HOW TO ACCESS

To access the user interface, connect a device such as a PC, smartphone or tablet to the router, by cable or wirelessly.

- Open the browser you use for browsing **(Safari, Firefox, Edge, Chrome);**
- In the address bar, type **http://192.168.1.1**
- Enter the **Password** shown on the grey label underneath the router and click **Registrazione** (Log In).

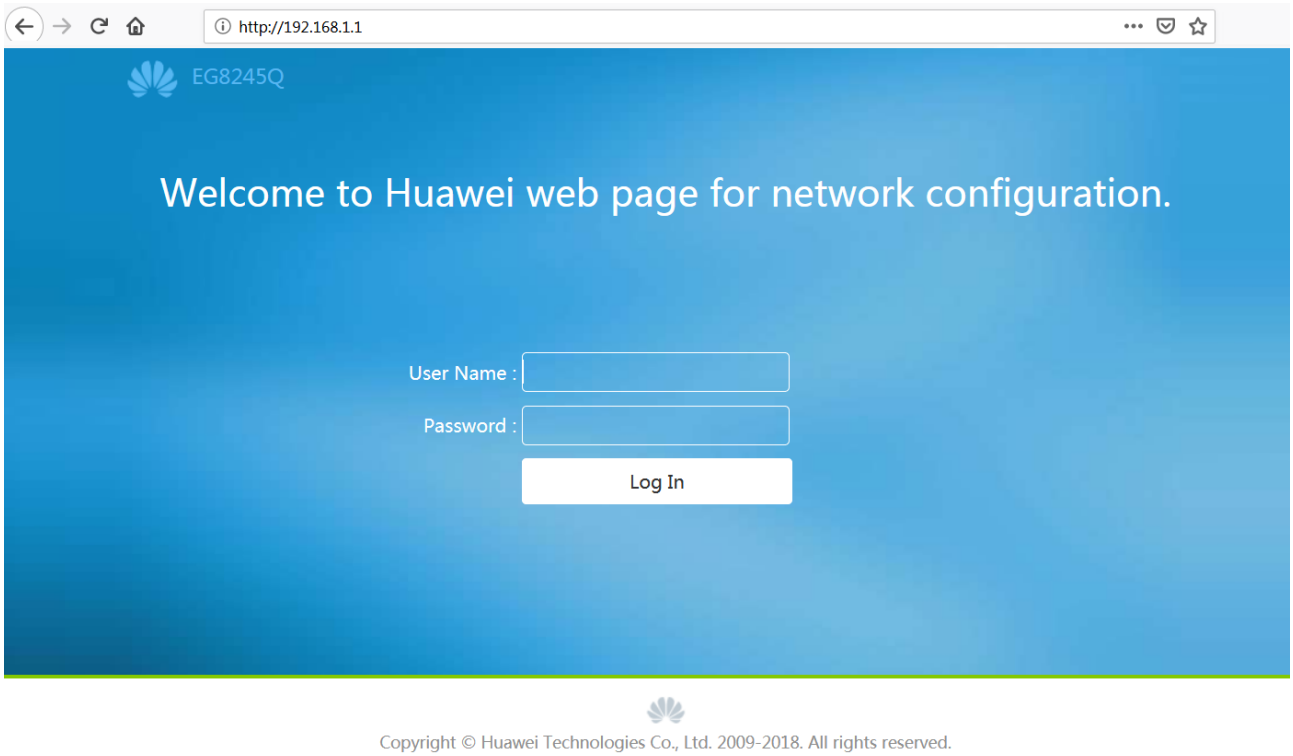

HUAWEI EG8145V5

Configuration interface


INTRED
CONNESSI SEMPRE

HOME PAGE

The Home Page shows information on the general status of the router.

Each of the icons shown on this screen can be clicked and will take you to a short summary of the specific service selected. From the summary you can also carry out some basic operations, including:

- **Internet:** information on the status of the Internet connection.
- **Wi-Fi configuration:** information on the status of the wireless connections, with the option of changing the network name (Wi-Fi Name) and its Password, for both the 2.4 Ghz and the 5 Ghz networks.
- **USB:** information on the status of the USB port.
- **RESET:** information on the router's system configurations. We advise against changing the settings in this section and/or resetting the router to its default settings.
- **Wi-Fi devices:** information on the status of the wireless devices paired with the router, with the option of preventing them from pairing using the **Add to Blacklist** button.
- **Wired devices:** information on the status of the devices connected to the router by Ethernet cable, with the option of preventing them from pairing using the **Add to Blacklist** button.
- **Phones:** information on the status of the telephones connected to the router, if the voice service is active.

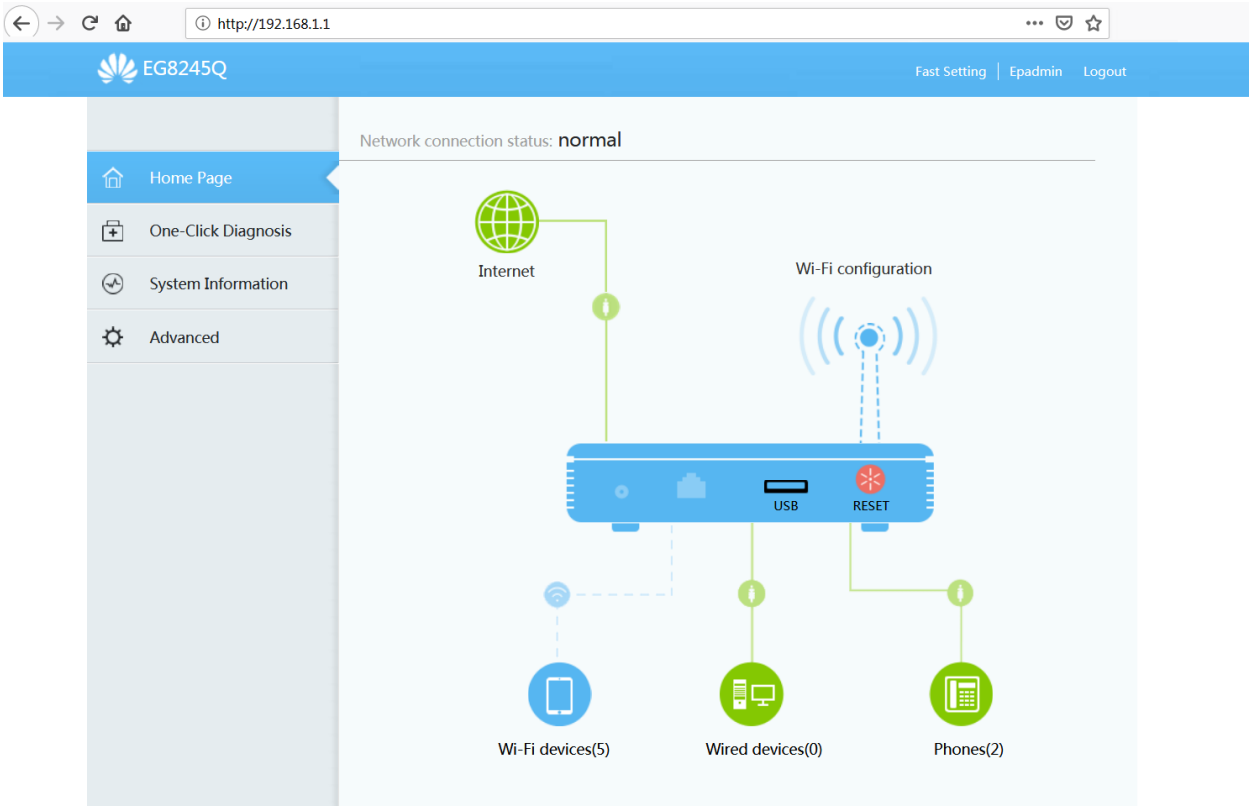

LAN


LAN HOST - DHCP SERVER

In most home networks there is no need to change the LAN settings, and all devices connected to the router should be able to browse normally. Only change the IP addressing data if your network has specific requirements. Please note that changing these parameters could cause one or more devices on the network to malfunction, so we advise against changing the settings on this screen unless you have in-depth knowledge of the subject.

To change the LAN settings, in the menu bar on the left click **Advanced** and then **LAN**.

Click **Lan Host** and change the **Primary IP Address** field, setting the IP address to assign to the router. Click **Apply**.

The DHCP server settings will change automatically based on the IP set. If there are specific DHCP options to change, click **DHCP Server** and change them as required.

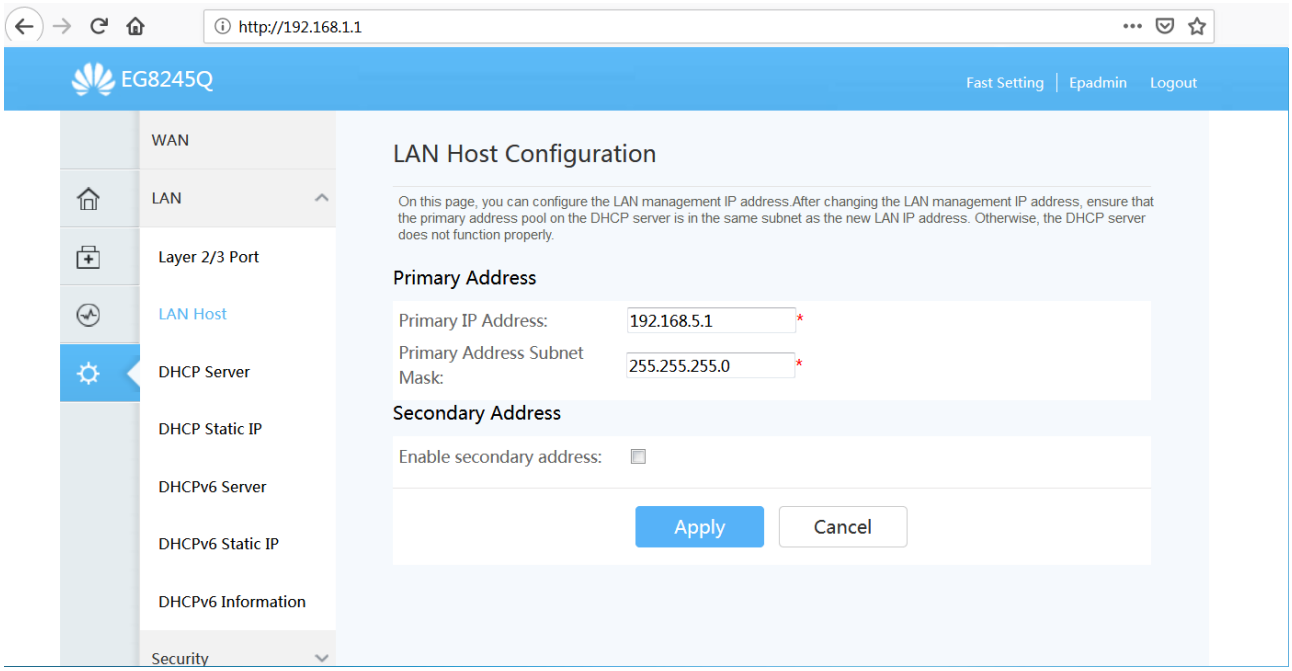

WLAN

2.4G/5G BASIC NETWORK SETTINGS

In the menu bar on the left, click **Advanced** and then **WLAN.**

The **2.4G Basic Network Settings** and **5G Basic network settings** sections show the same configurations for the 2.4 Ghz and the 5 Ghz bands respectively.

Select one of the two, depending on the network you want to change.

The settings applied by Intred when configuring the router are shown below. Intred's configurations are applied in the same way to both the 2.4 Ghz and the 5 Ghz networks.

From the settings on this screen you can:

- Enable or disable the network with the **Enable WLAN** option.
- Change the network name (SSID Name). Devices will then display this name when searching for the network.
- Decide whether to hide or show your network's SSID with the **Broadcast SSID** option.
- Add or remove a network with the **New** and **Delete** options.

You can also change the network security options with the following settings:

- The network encryption method, from the **Authentication Mode** drop-down menu: we recommend keeping **WPA/WPA2PreSharedKey** encryption to avoid some devices on the network malfunctioning;
- The password for accessing the Wireless network: change the value in the **WPA PreSharedKey** field.


Click **Apply** for the changes to take effect.

We advise against changing the other values on this screen, to avoid some devices on the network malfunctioning.

HUAWEI EG8145V5

Configuration interface

INTRED
CONNESSI SEMPRE

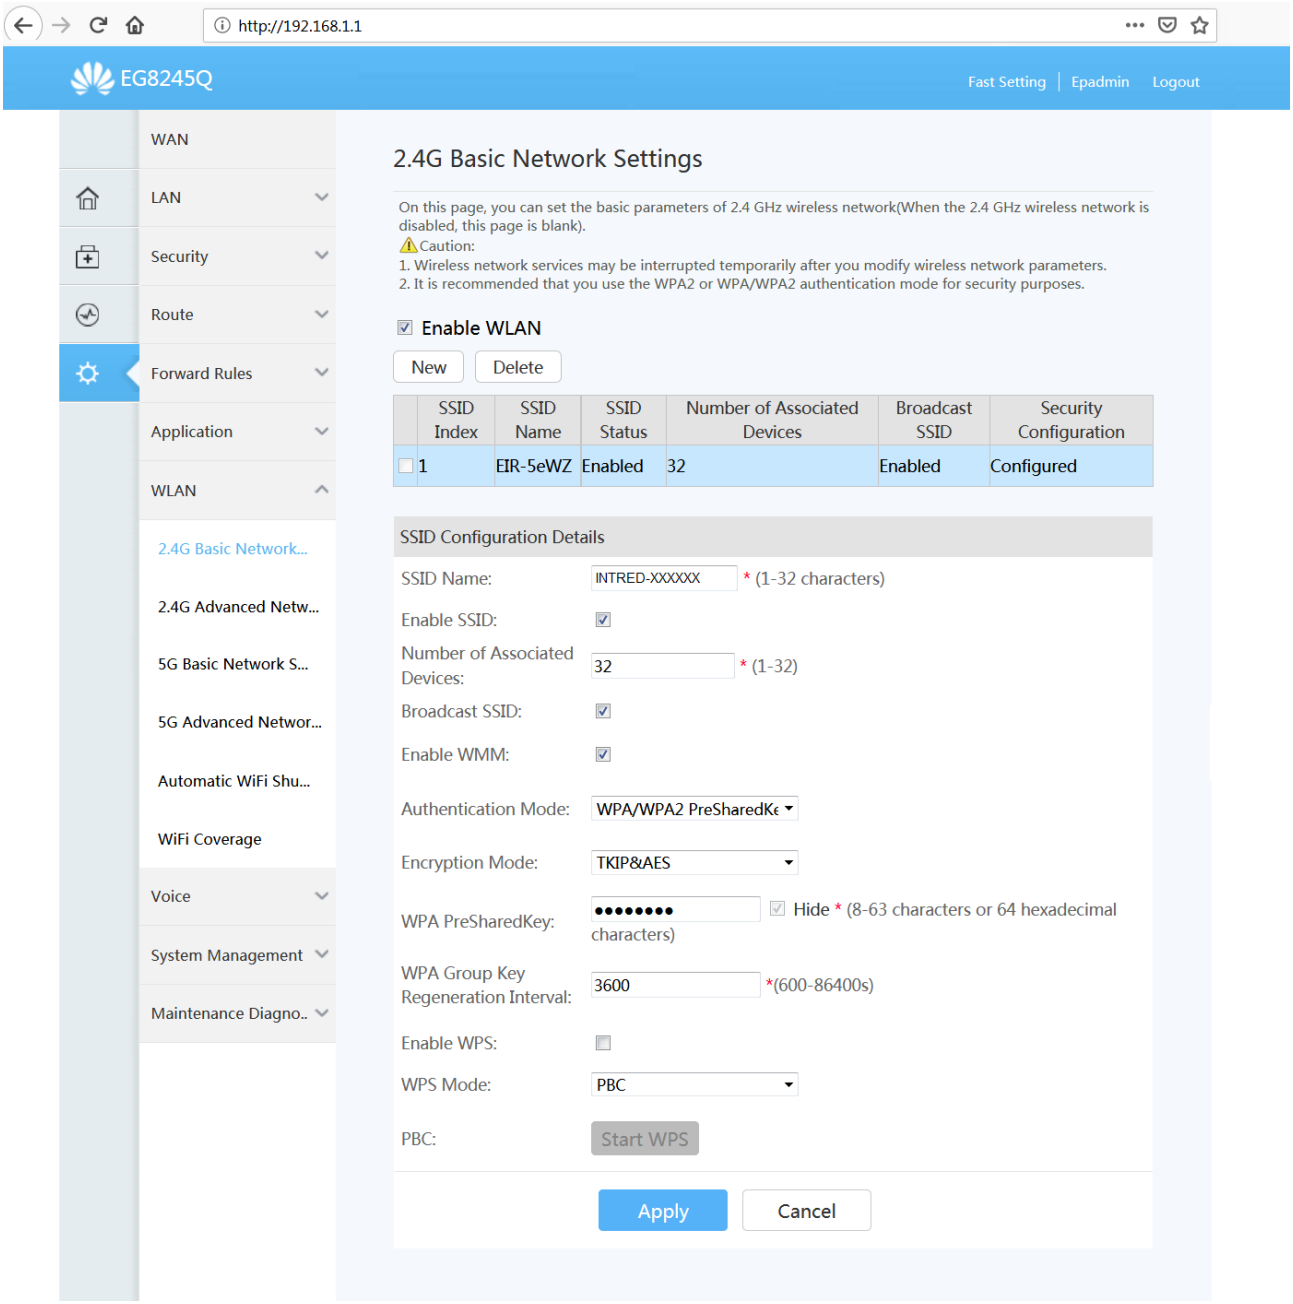


2.4G/5G ADVANCED NETWORK SETTINGS

In the menu bar on the left, click **Advanced** and then **WLAN**.

The **2.4G Advanced Network Settings** and **5G Advanced network settings** sections show the same configurations for the 2.4 Ghz and the 5 Ghz bands respectively.

We recommend using this section only to change the wireless transmission channel. The router is already configured to select the best wireless channel. The channel should only be changed if there are degradation problems strictly related to wireless performance. In any case, we recommend reading up thoroughly before changing the channel.

From the **Channel** drop-down menu, select the transmission channel you want to use. Click **Apply**.

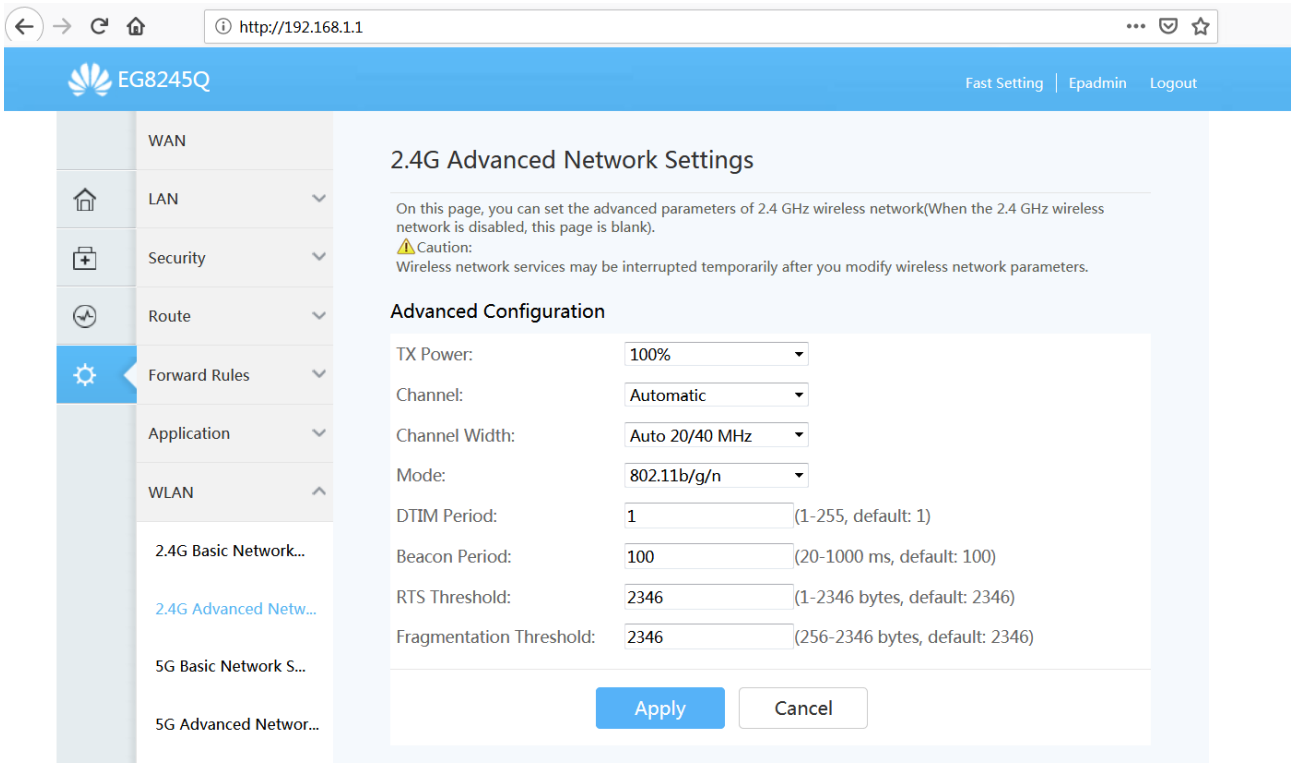


AUTOMATIC WiFi SHUTDOWN

In the menu bar on the left, click **Advanced** and then **WLAN**.
Then click **Automatic WiFi Shutdown**.

In this section you can switch the wireless network off or on only during specific time slots of your choice.
Tick **Automatic Shutdown Configuration** to enable the option.

Fill in the fields as required and finally click **Apply**.

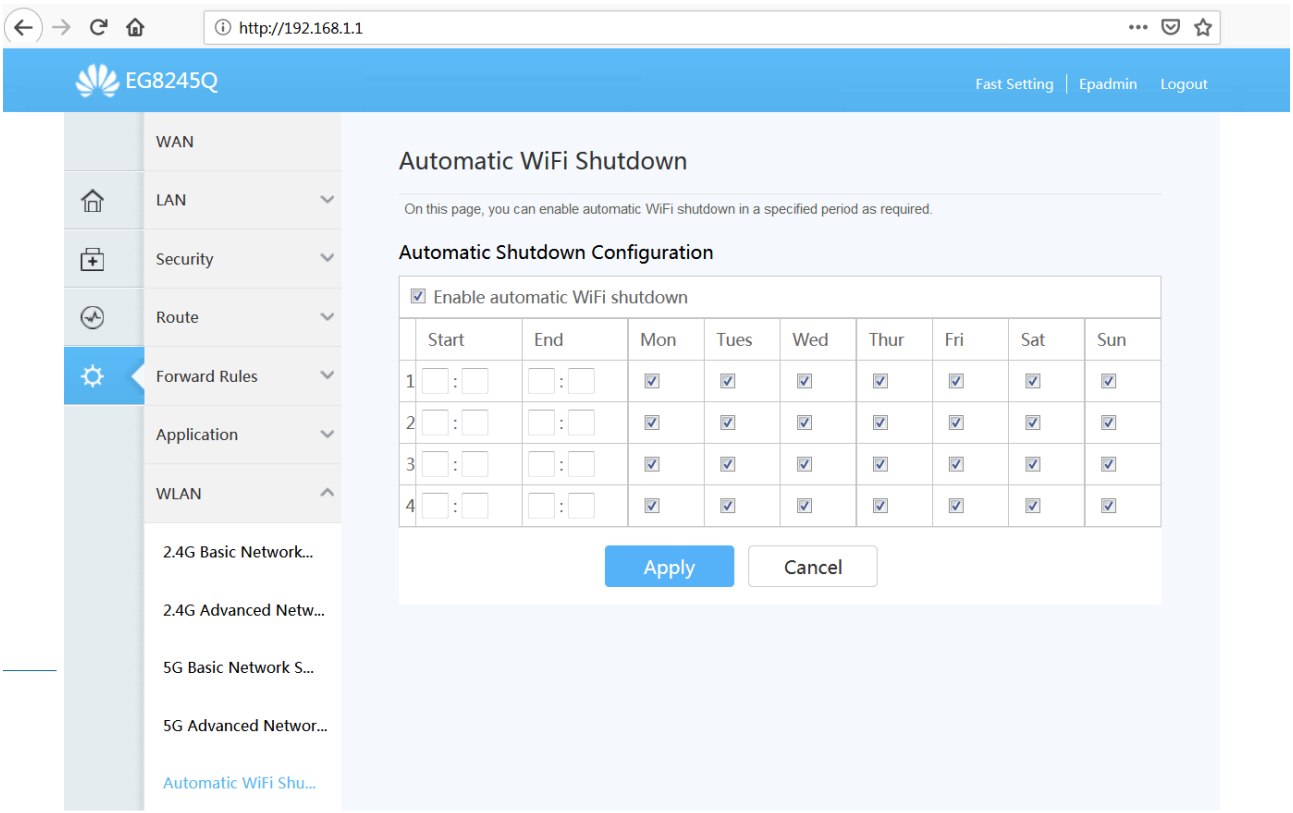

FORWARD RULES

PORT MAPPING CONFIGURATION

Intred lines are currently configured with NAT (private IP/shared public IP). As a result, the configurations applied in the **Forward Rules** section (port opening) may not work even if they are set correctly. If, after port opening has been set correctly, the services still do not work properly, you will need to contact Intred Sales Support and subscribe to the **Static Public IP** service.


Please remember that the current NAT configuration of the Intred line does not in any way prevent a normal browsing experience, and all Internet services remain fully usable.

Therefore, only proceed with the necessary configurations after subscribing to the **Static Public IP** service.

In the menu bar on the left, click Advanced and then **Forward Rules**.

Then select **IPv4 Port Mapping**.

Now click **New**.

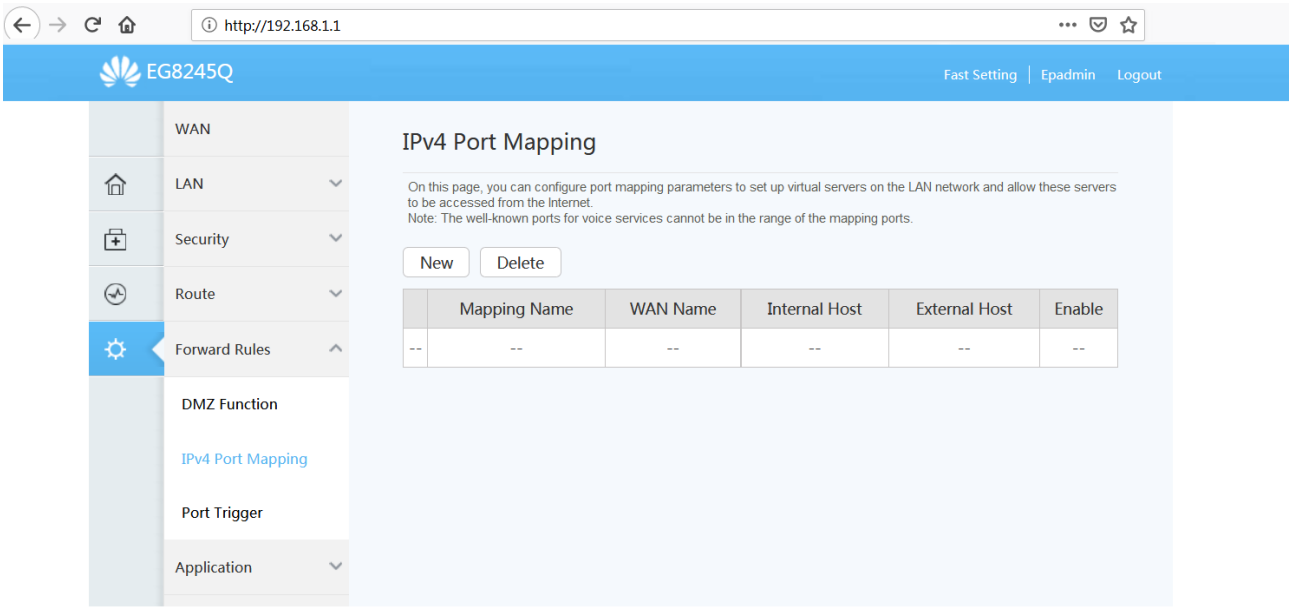


Click **Add** and fill in the fields displayed as required.

Leave the default **User-defined** option under **Type** if you need to open specific ports with their protocol. Instead, tick the **Application** option under **Type** and then select an option from the **Application** drop-down menu if the port to be opened is one of those offered in the list.

Please remember, in any case, that Intred does not know either the internal IP addresses set on your devices or the ports that need to be enabled for the various applications on the market, so you will need to obtain this information directly from the device itself and from the application provider.


Finally, click **Apply**.

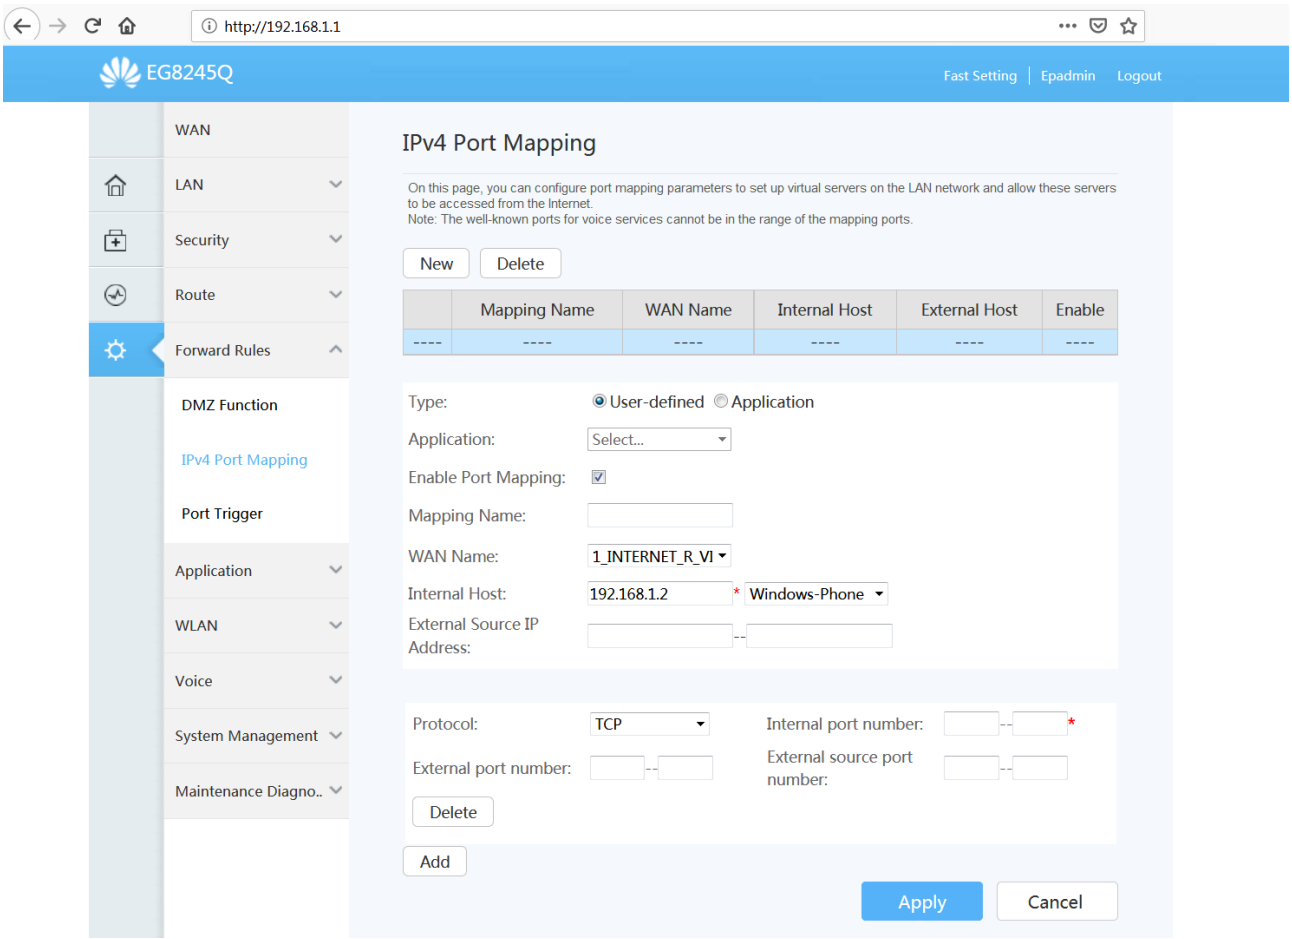

Once you have set up port opening rules, they will be shown as a list on the main page of the **IPv4 Port Mapping** section.

To make changes to an applied rule, select it from the list and change the necessary fields. Then click **Apply**.

To remove applied rules, select the rule from the list and click **Delete**.

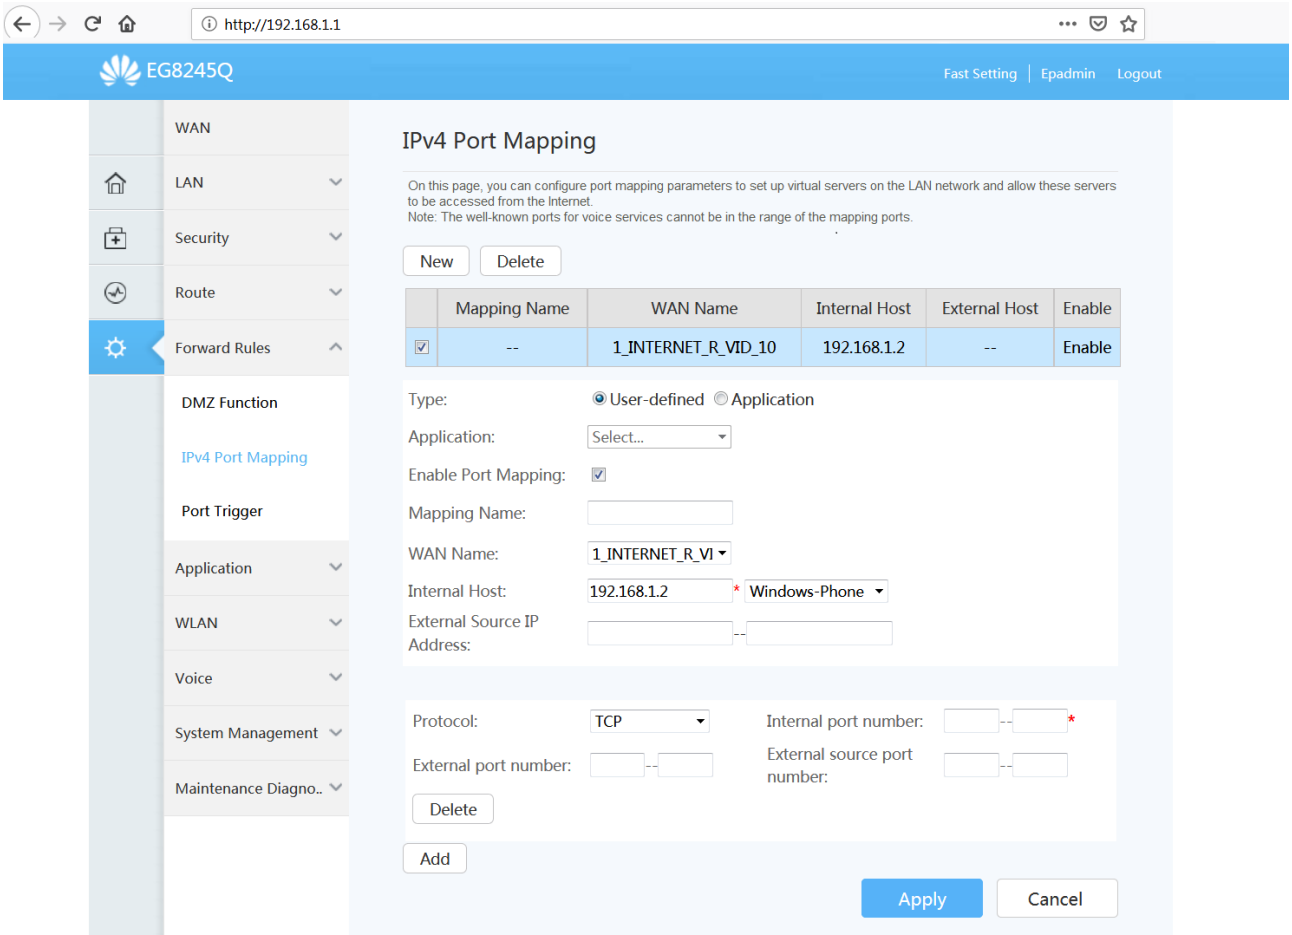

Please remember that HUAWEI routers are configured by Intred for maximum line performance. We therefore advise against changing the device settings unless you know exactly what changes you are making.

Intred advises against changing any other configuration or parameter, apart from those listed above, so as not to cause stability or performance issues with the service provided.

HUAWEI EG8145V5

Configuration interface

This document is an English translation of the original Italian document and is provided for ease of reference. The translation may contain errors, omissions or inaccuracies. In the event of any discrepancy or inconsistency between this translation and the Italian original, the Italian original shall prevail to the extent permitted by applicable law.